


5- What are the options of the wall finishing at the top?

Cap Units : Standard & Compac


A Keystone retaining wall is not complete without the "capping touch." The two primary wall units, the Standard and Compac units, both have open voids, making them an aesthetically undesirable finish for the top of the wall. Keystone offers a selection of cap designs, available in various combinations of facial finish and degrees of angled sides*. The following information will clearly explain the uses of these units and show a variety of finishing techniques. You may also opt to finish your wall with a precast decorative concrete finishing option, see your local manufacturer for details.

CAPPING UNITS


Universal Cap - finished on both front and back

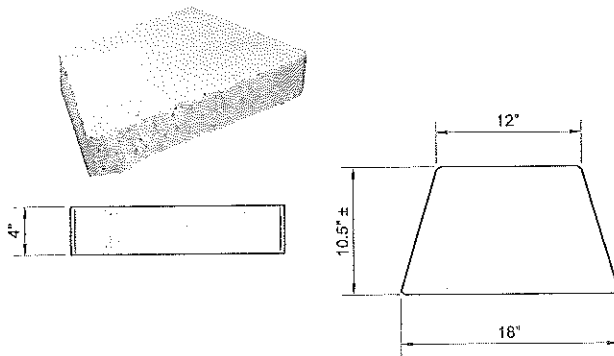


Straight-face straight-sided

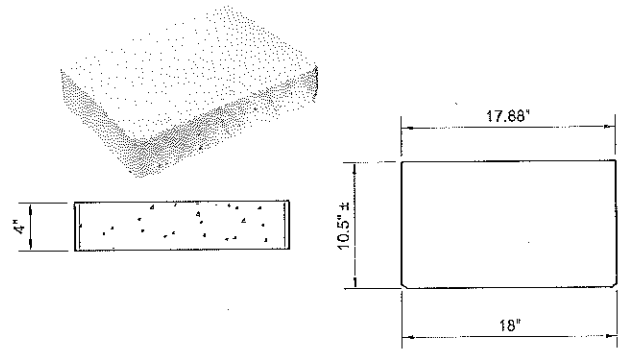

Tri-plane angle-sided

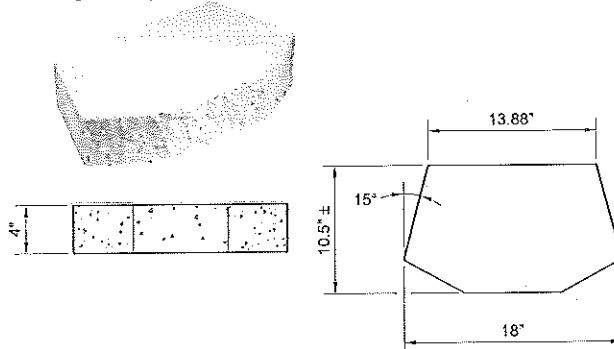


Tri-plane - Straight-sided

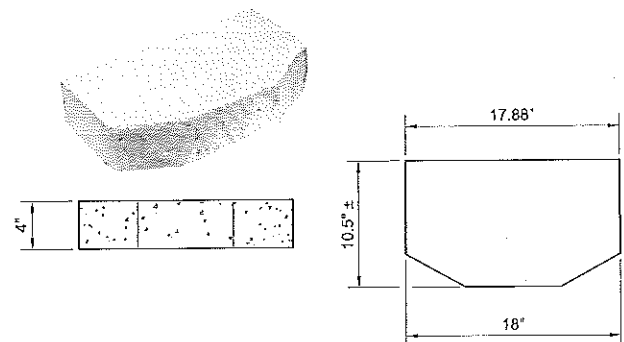


NOTE: UNIT WEIGHTS, DIMENSIONS AND AVAILABILITY VARY BY MANUFACTURER. PLEASE CONTACT YOUR LOCAL REPRESENTATIVE.

FIGURE R:2 - CAP SETBACK OPTIONS

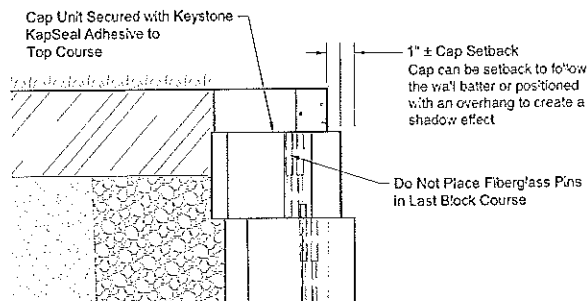

Cap Setback - 1 Inch Setback Section

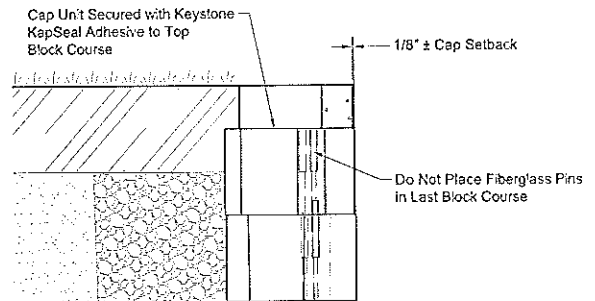

Cap Setback - Near Vertical Setback Section

* "8" capping option not shown. Capping options and product designs vary by manufacturer. Contact your local manufacturer for availability. Capping is not required to guarantee structural stability, capping improves the aesthetics of the finished wall.

Capping : Standard & Compac

Like other Keystone units, all cap units can be used interchangeably. Depending on the wall contour, some cap units will work more effectively than others (i.e. angled side units for concave curves). In any given installation, if binding occurs between units, the units can be modified to fit using a concrete saw, chisel or other device. Make sure to wear proper PPE equipment when splitting or cutting.

Installation of the cap units is a simple one step operation. Sweep the lower units clean and make sure the units are dry; use a construction adhesive (ex. Keystone KapSeal™) on the top surface of the last course before applying cap units (see Figure I:1 on page 19 for installation instructions). The following illustrations demonstrate common uses of the Keystone cap units.

FIGURE S:2 - CONVEX CURVES -
ANGLED SIDED CAPS

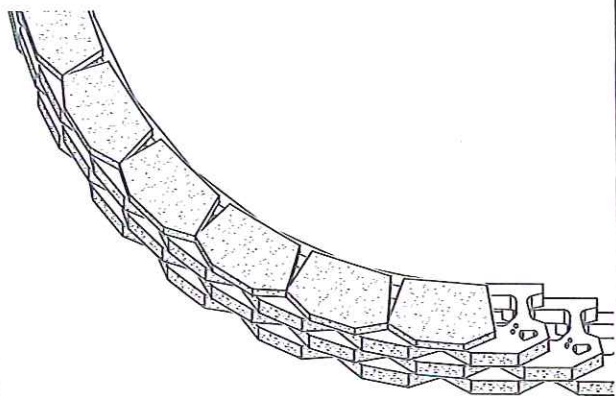


FIGURE T:2 - CONVEX CURVES -
UNIVERSAL CAPS

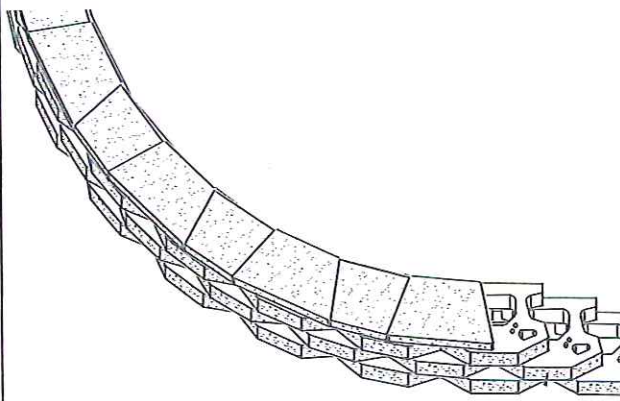


FIGURE U:2 - CONCAVE CURVES -
ANGLED SIDED CAPS

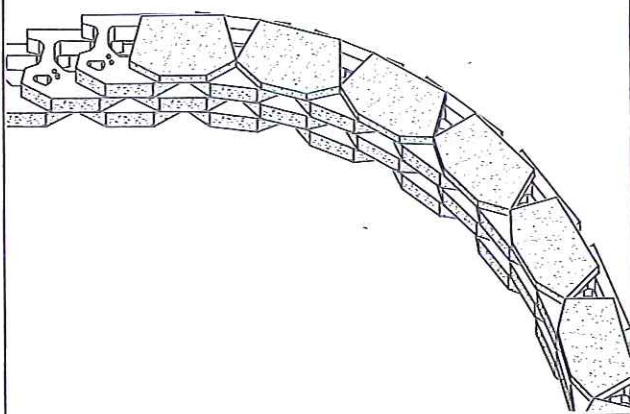


FIGURE V:2 - CONCAVE CURVES -
UNIVERSAL CAPS


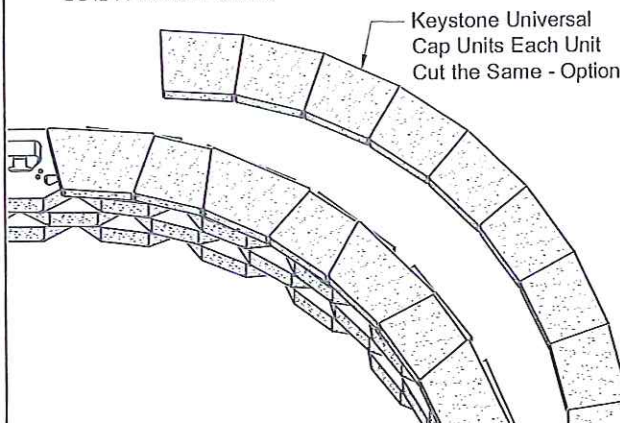


FIGURE W:2 - STRAIGHT WALL - UNIVERSAL CAPS AND TRI-PLANE ANGLE-SIDED CAPS

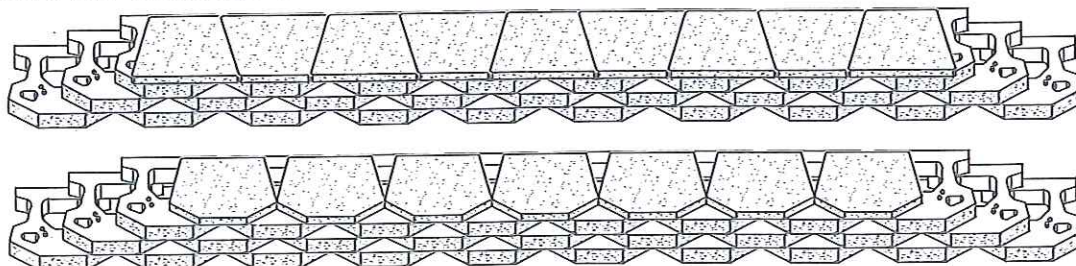


The information contained herein has been compiled by Keystone® Retaining Wall Systems, Inc. and to the best of our knowledge, accurately represents the Keystone product use in the applications which are illustrated. Final determination of the suitability for the use contemplated and its manner of use are the sole responsibility of the user. Structural design and analysis shall be performed by a qualified engineer.


Capping : Standard & Compac

The size of each Keystone unit makes this system very adaptable to grade changes. The top of a Keystone wall can be constructed with level top of wall grade or up to 1:1 unit step downs from the top of the wall. These grade changes may occur along the length of a wall or at its points of origin. As cap units step up and down grades, an additional installation procedure is required to firmly fix some cap units in position. To prevent showing the unit voids at the stepping of a wall (Standard or Compac), 4 inch cap units can be double stacked or one 8 inch cap unit may be placed at each step down or step up location (see Figure C:1 on page 14). Each additional cap unit is offset 9 inches (23cm) to maintain the running bond wall pattern. The caps should be attached using a bonding material. Keystone KapSeal™ adhesive is designed for this use with a special formulation to withstand temperature and moisture extremes. If this material is unavailable, other flexible epoxy based adhesives designed to bond concrete or masonry may be used. Refer to manufacturer's instructions for complete details. Apply the adhesive to areas where the units make contact (see Figure I:1 on page 19 for installation instructions).

Ⓢ FIGURE X:2 - STRAIGHT WALL WITH DOUBLE-STACKED CAP STEP

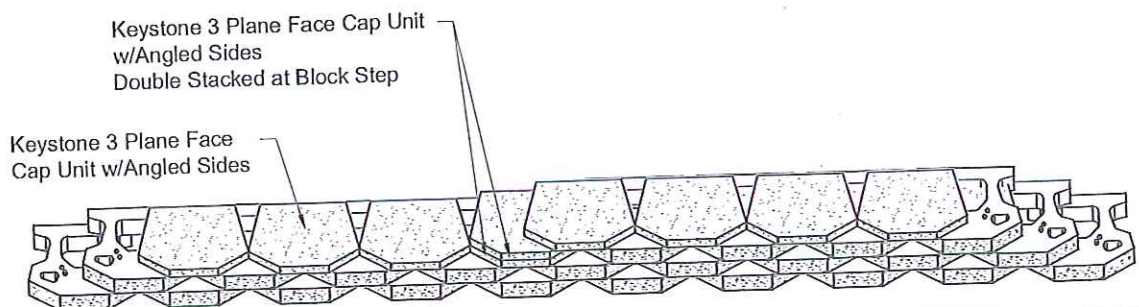

Ⓢ FIGURE Y:2 - RANDOM STEPS WITH SPLIT DOUBLE-STACKED UNIVERSAL CAPS

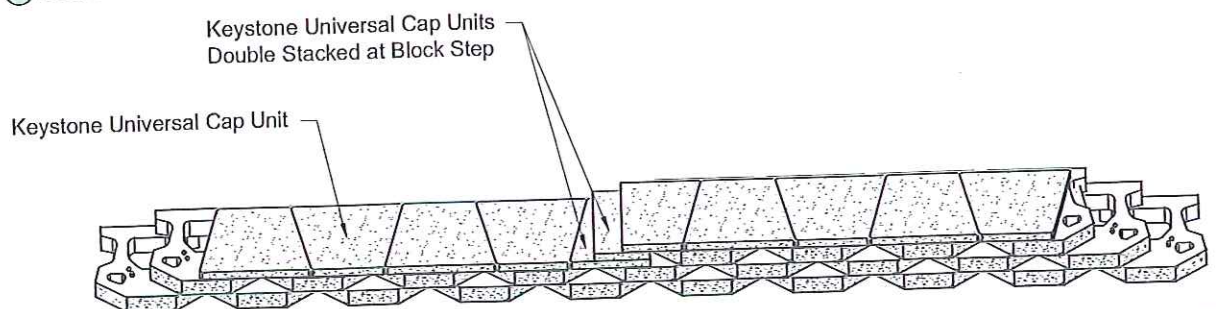

The information contained herein has been compiled by Keystone® Retaining Wall Systems, Inc. and to the best of our knowledge, accurately represents the Keystone product use in the applications which are illustrated. Final determination of the suitability for the use contemplated and its manner of use are the sole responsibility of the user. Structural design and analysis shall be performed by a qualified engineer.

Cast in Place Coping : Standard & Compact

If Keystone cap units are not a desired top of wall treatment, or if concrete coping is required in the project plans, the following details are for a typical CIP coping option. These two concrete coping options are installed with proper form work and add an alternate aesthetically pleasing look to the top of the wall that can follow profile grades with the steps.

FIGURE Z:2 - PARTIAL CAST IN PLACE CONCRETE COPING


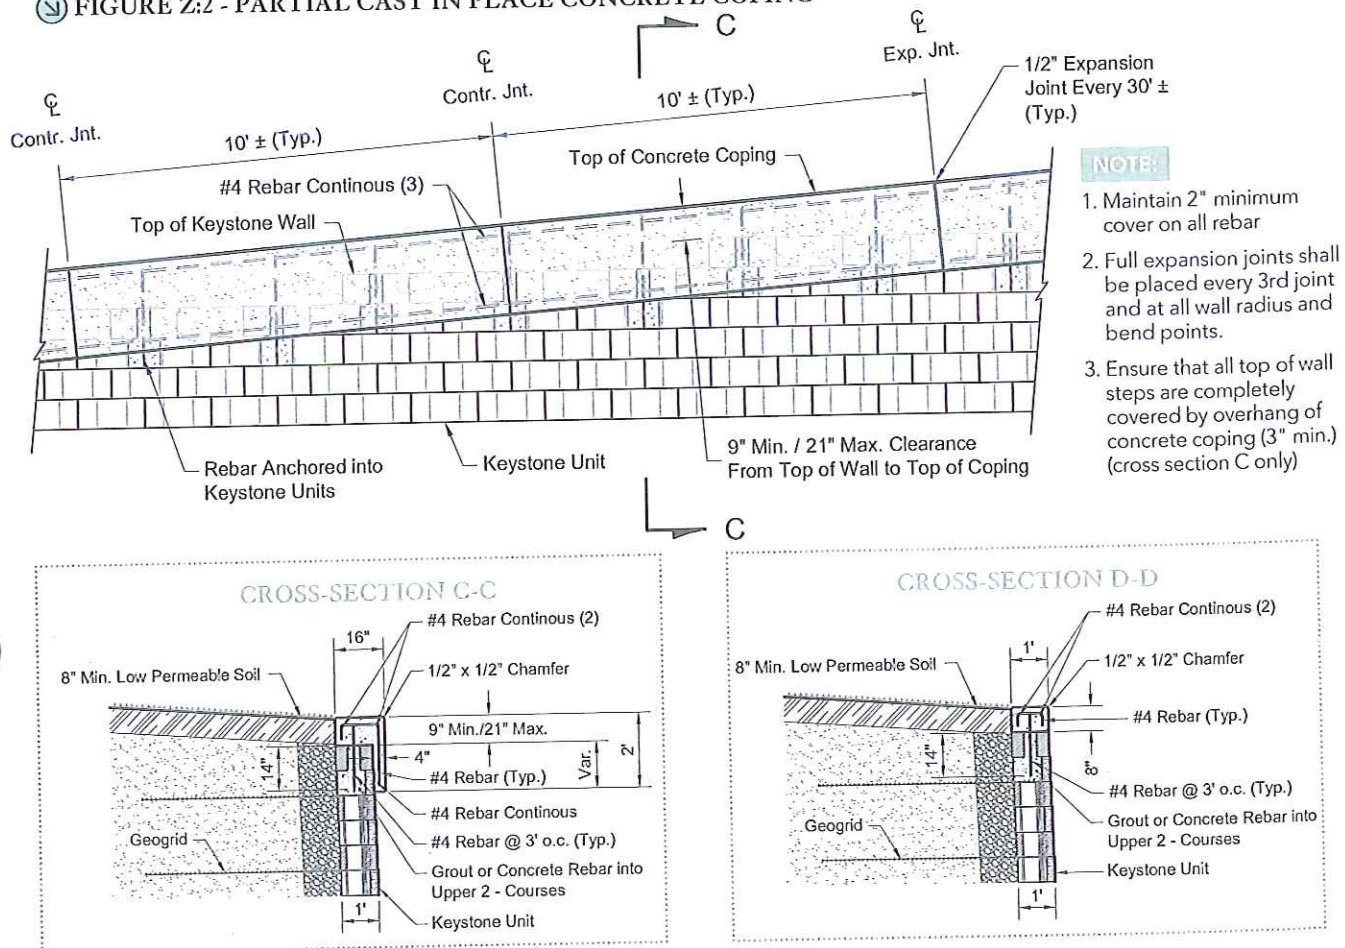


FIGURE A:3 - PARTIAL CAST IN PLACE TOP CONCRETE COPING DETAIL

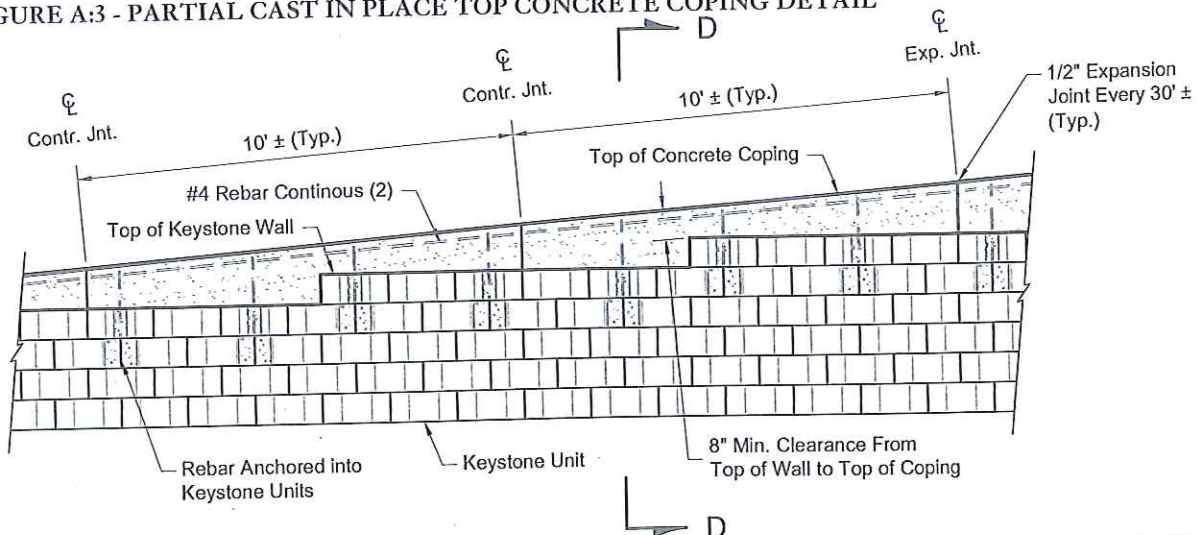

The information contained herein has been compiled by Keystone® Retaining Wall Systems, Inc. and to the best of our knowledge, accurately represents the Keystone product use in the applications which are illustrated. Final determination of the suitability for the use contemplated and its manner of use are the sole responsibility of the user. Structural design and analysis shall be performed by a qualified engineer.